




HA-304B20VST Star Light Camera

HD AHD CAMERA SERIES

CCTV SURVEILLANCE 4-in-1 (AHD/TVI/CVI/CVBS)

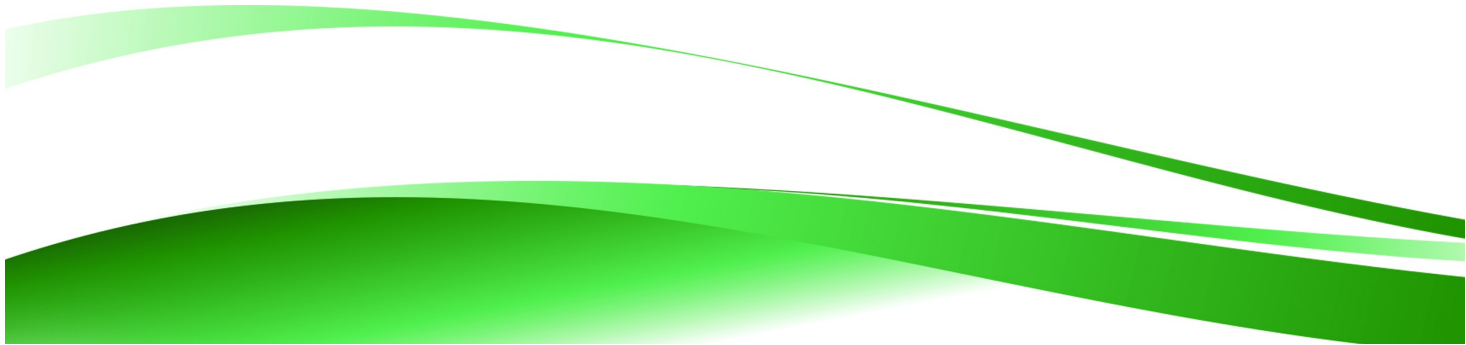




Feature

- 1/2.8" CMOS Progressive Scan
- 1080P (4-in-1, AHD/TVI/CVI/CVBS)
- Min. Illumination 0.0001 lux
- Day Night Support IR CUT
- Lens 2.8-12 mm. lens /F1.3
- IR LED 42 Pcs. (5mm. IR LED 40 Meter)
- IR Distance 40 Meters when IR on
- Power Requirement DC12V (+-10%)
- Cable BNC
- Surge Protection ESD surge protection up to 5000Volt power supply
- OSD menu Support COC
- IP66

Camera Cable



Specification

Model	HA-304B20VST
Image Sensor	1/2.8" CMOS Progressive Scan
Resolution	1080P (4-in-1, AHD/TVI/CVI/CVBS)
Total Pixels	PAL:1920x1080P
Scanning Frequency	PAL:15.625Khz (H), 50Hz (V)
Scanning System	2:1 interlace
S/N Ratio	More than 52dB. (AGC off)
Min. Illumination	0.0001 lux
Sync. System	Synchronization
Electric Shutter	Auto: PAL 1/50-1/100,000Sec
Gamma	Y = 0.45
Video Output	1.0 Vp-p Composite (75Ω)
Video Format	PAL/NTSC
AGC	Auto
D-WDR	Support
SENS-UP	Support
DEFOG	Support
Backlight Control	BLC
ATW	Support
NR	Support 3D-DNR
Cam Title	Support
D-Effect	Support
Motion	Support
LSC	Support
Image adjust	Sharpness, Color
Day Night	Support IR CUT
Lens	2.8-12 mm. lens /F1.3
IR LED	42 Pcs. (5mm. IR LED 40 Meter)
IR Distance	40 Meters when IR on
IR LED Operating	On (1 lux) / Off (3 lux)
Led life	More than 10,000 hours
Power Requirement	DC12V (+-10%)
Power Consumption	IR on: 420 mA., IR off 50 mA.
Cable	BNC
Surge Protection	ESD surge protection up to 5000Volt power supply
OSD menu	Support COC OSD cable with auto close function
Ingress Protection	IP66
Operation Temp	-10°C~+50°C RH95 MAX
Storage Temp	-20°C~+60°C RH95 MAX
Dimension	255x73x82mm
Weight	0.9Kg.